

Time switch technology

Digital time switches, Fronttafeleinbau/Wandmontage



Description

tactic smart E

The tactic smart provides versatile application options throughout the building and outdoors. It is used for universal switching tasks such as in switchgear, machine controls, or specific solutions as swimming pool controls and sprinkler systems. The tactic smart is suitable for universal wall installation as well as for installation in switching applications, or for top-hat rail mounting.

The device can be operated and programmed via Bluetooth with the talento smart App.

Product selection

Program	Type of installation	Operating voltage	Type	Item no.
Weekly, yearly and astronomical functions, pulse and cycle function	Wall-mounting	110–230 V AC	tactic smart E	43.87.0003.1


Time switch technology

Digital time switches, Fronttafeleinbau/Wandmontage

Technical data

	tactic smart
Operating voltage	110–230 V AC
Frequency	50–60 Hz
Switching capacity at 250 V AC, $\cos \varphi = 1$	16 A
Switching capacity at 250 V AC, $\cos \varphi = 0.6$	10 A
Incandescent/halogen lamp load	2600 W
LED load	400 W
Ambient temperature	–20 °C ... +55 °C
Time accuracy	$< \pm 0.3$ s/day at 20 °C
Power reserve	8 years
Standby output	< 1 W
Relay outputs	1
Progr. functions	Weekly function, yearly function, Astro function, pulse/cycle function
Protection rating	IP 20
Type of installation	Wall-mounting

Scale drawings

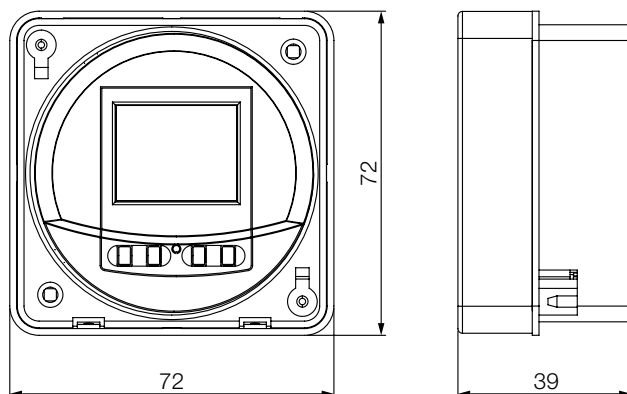

Connection example

